

## **CX4-6**

100017-T

Marine and Land Based VHF Antenna. Tx/Rx. 150W 0 dBd. N female. Packed in a tube

This is an omnidirectional dipole antenna manufactured in premium quality materials in order to prevent galvanic corrosion. Radiating elements are made of brass. The antenna is manufactured using crimping technology giving the antenna a 4-5 times stronger build-up. The antenna is always subject for improvement. The antenna has the same rugged design as all other AC Antennas products thus it withstands harsh environmental conditions, both on Sea and Land.

## **Short description**

Product group	VHF
Design	Coaxial dipole
Pattern	Omnidirectional

## **Electrical specifications**

Frequency range [MHz]	146.0-162.5
Bandwidth [MHz]	16.5
Nominal Impedance [Ohm]	50
Max. Input Power [Watt]	150
Gain [dBd/dBi/Marine dB]	0/2.15/3
VSWR	<1.5:1
Polarisation	Vertical
DC Shorted	Yes
DC Grounded	Yes
Connector	N-Female


## **Mechanical specifications**

Length [m/ft]	1.26 / 4.14
Sections	
Weight [kg/lbs]	0.50 / 1.10
Survival Wind Speed [km/h / m/s / mph]	200 / 55 / 124
Wind Area [m2/ft2]	0.0186 / 0.2002
Wind Load @ 160km/h [N]	27
Material	Fibreglass
Colour	White
Operating Temperature Range [°C/°F]	-55 to +70 / -67 to +158
Operating Temperature Range [°C/°F] Ingress Protection	
, , , , , , , , , , , , , , , , , , , ,	-55 to +70 / -67 to +158



AC Antennas A/S · Fabriksparken 40 · DK-2600 Glostrup · Denmark · Tel: +45 4581 0413 acantennas@acantennas.com · www.acantennas.com



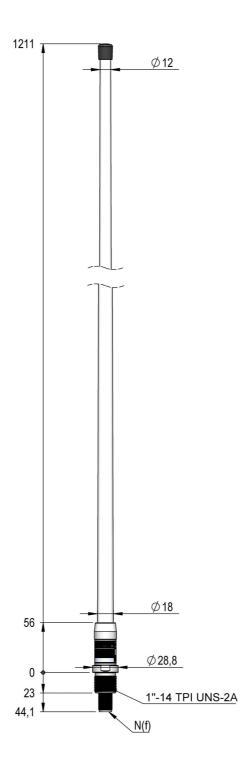

AC Antennas A/S · Fabriksparken 40 · DK-2600 Glostrup · Denmark · Tel: +45 4581 0413 acantennas@acantennas.com · www.acantennas.com