KUM803DM

280306-P

Marine and Land Based MF/HF Antenna. Tx/Rx. 1200W 8m. 3 sections. Wire installation. Deck mount. Packed in a plastic bag

The antenna is a 3-section omnidirectional side-fed HF transceiver antenna for automatic antenna tuned systems for both commercial vessels and leisure. The antenna is manufactured in premium quality materials in order to prevent galvanic corrosion. Radiating elements are made of copper. The antenna is manufactuted using crimping technology giving the antenna a 4-5 times stronger build-up. Installation via the integrated deck mount. The antenna has been sold worldwide for more than five decades. The antenna is subject for improvement at all times. The antenna has the same rugged design as all other AC Antennas products thus it withstands harsh environmental conditions, both...

Short description


| HF/SSB |
|-----------------|
| Wire antenna |
| Omnidirectional |
| |

Electrical specifications


| Frequency range [MHz] | 1.4-30 |
|-----------------------------|------------------------|
| Bandwidth [MHz] | 28.6 |
| Max. Input Power [Watt] | 1200 PEP |
| Max. HF Voltage [Kv] | 18 |
| Insulation Resistance [Ohm] | >10 E9 |
| Static Capacitance [pF] | 100 |
| Polarisation | Vertical |
| DC Shorted | No |
| DC Grounded | No |
| Connector | Side Feed Bolt M8x1.25 |

Mechanical specifications

| • | |
|--|--------------------------|
| Length [m/ft] | 7.88 / 25.90 |
| Sections | 3 |
| Weight [kg/lbs] | 8.00 / 17.70 |
| Survival Wind Speed [km/h / m/s / mph] | 200 / 44 / 124 |
| Wind Area [m2/ft2] | 0.2018 / 2.1722 |
| Wind Load @ 160km/h [N] | 293 |
| Material | Fibreglass |
| Colour | White |
| Operating Temperature Range [°C/°F] | -55 to +60 / -67 to +140 |
| Ingress Protection | IP66 |
| Thread | / - |
| Mounting | Deck mount integrated |



AC Antennas A/S · Fabriksparken 40 · DK-2600 Glostrup · Denmark · Tel: +45 4581 0413 acantennas@acantennas.com · www.acantennas.com AC ANTENNAS <

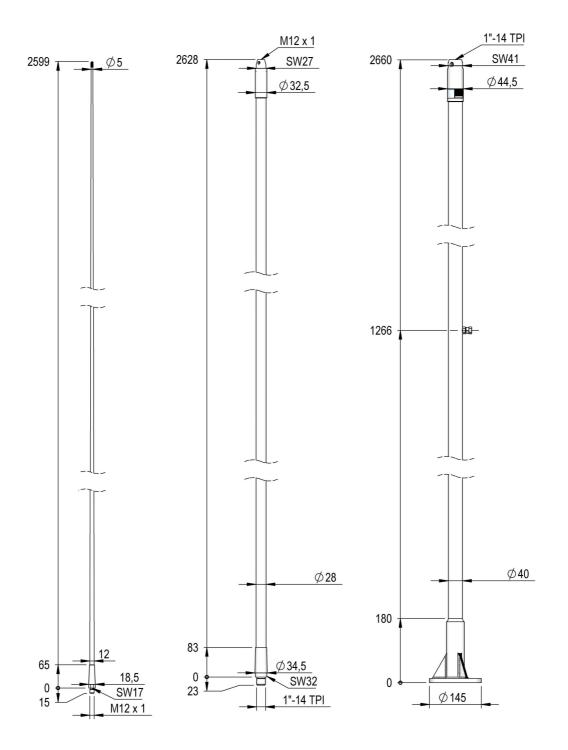

AC Antennas A/S · Fabriksparken 40 · DK-2600 Glostrup · Denmark · Tel: +45 4581 0413 acantennas@acantennas.com · www.acantennas.com