


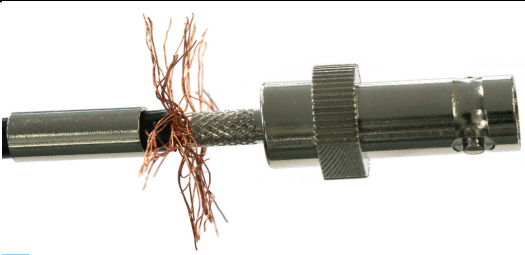
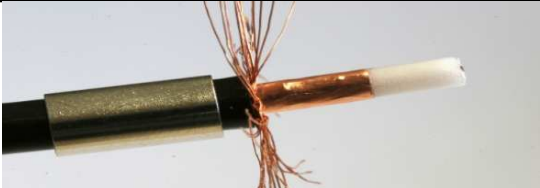

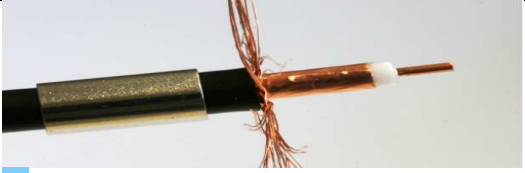



# Mounting instruction



## AIRCELL®5

BNC-Socket, crimp/solder / Art. No. 7723

 <p><b>1.</b> Cut off cable tail right-angled. Move the crimp sleeve over the cable tail. Remove 16mm of the outer sheathing with a knife.</p>	 <p><b>5.</b> Put the inner pin onto the inner conductor and solder it.</p>
 <p><b>2.</b> Bend copper braid upwards right-angled.</p>	 <p><b>6.</b> Insert the so prepared cable end into the connector housing as far it goes (click).</p>
 <p><b>3.</b> Remove 6mm of the copper foil with a knife.</p>	 <p><b>7.</b> Cut off the copper braid and move the crimp sleeve forward.</p>
 <p><b>4.</b> Remove 4mm of the foamed dielectric.</p>	 <p><b>8.</b> Crimp the crimp sleeve with a crimp tool; herewith the copper braid will be clamped between the socket housing and the crimp sleeve.</p>